

# OUTDOOR HOUSING FOR VIDEO PROJECTORS



**PROIETTA®**

INSTALL YOUR PROJECTOR/LASER OUTDOOR WITH NO  
WORRIES ABOUT DUST, WEATHER, AND THEFTS

MADE IN ITALY - MADE BY PROIETTA



# PROIETTA **DESIGNS** CUSTOMIZED ENCLOSURES AND ACCESSORIES ACCORDING TO SPECIFIC REQUESTS



S. FRANCISCO - Let's Glow SF 2021

All projectors have limited operating conditions according to a temperature and humidity range. PROIETTA has created the outdoor system for 3D videomapping, water screen and more. Which, through a dedicated forced-air ventilation function, allows the use of video projectors / laser in outdoor environments without problems related to the climatic conditions.

## **BUILT MATERIALS:**

- fiber glass
- aluminium
- stainless steel

The PROIETTA case enclosure are all suitable for:



LASER



LANDSCAPE



PORTRAIT




STACK



MULTI  
PORTRAIT

# AF6

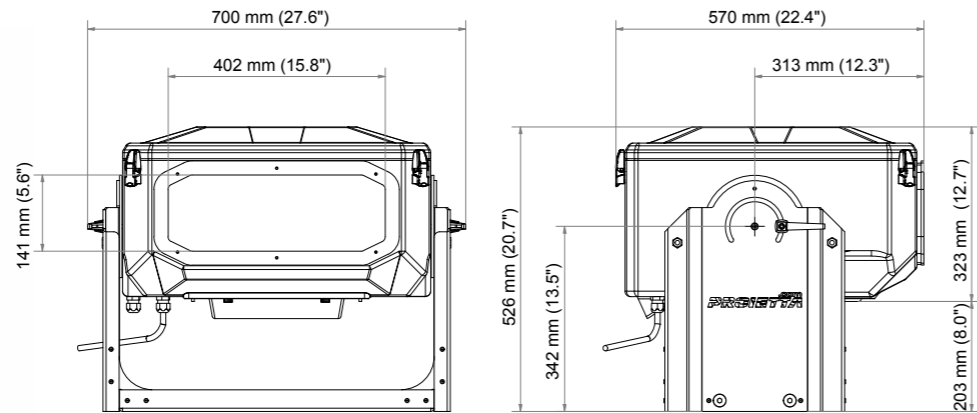

## SPECIFICATIONS:

**WEIGHT:** 30,0 kg (66.1 lbs)


**CONSUMPTION:**

Max consumption cooling mode: 50 W / 0,2 A


Max consumption during heating and dehumidification mode: 330 W / 1,5 A

### AF6 AVAILABLE SPACE WITHIN THE CASE:


	METRIC UNITS	ENGLISH UNITS
width	480 mm	18.9"
height	200 mm	7.9"
depth	360 mm	14.2"

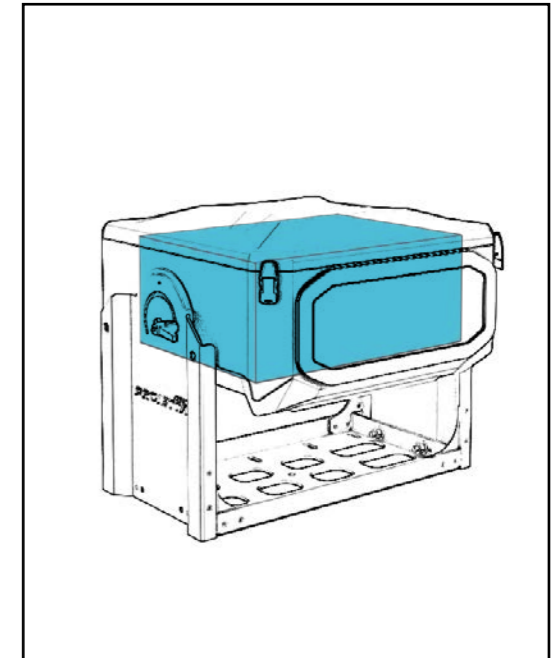

### SUITABLE FOR



# AF6-H

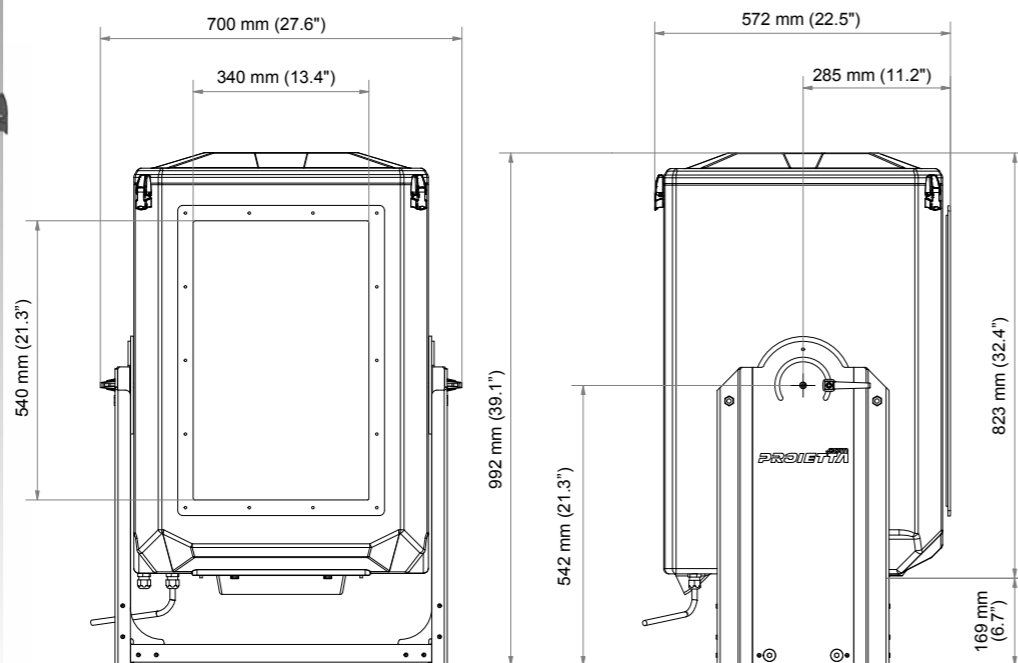

## SPECIFICATIONS:

**WEIGHT:** 45,0 kg (99.2 lbs)


**CONSUMPTION:**

Max consumption cooling mode: 50 W / 0,2 A

Max consumption during heating and dehumidification mode: 330 W / 1,5 A

### AF6-H AVAILABLE SPACE WITHIN THE CASE:


	METRIC UNITS	ENGLISH UNITS
width	480 mm	18.9"
height	700 mm	27.6"
depth	360 mm	14.2"

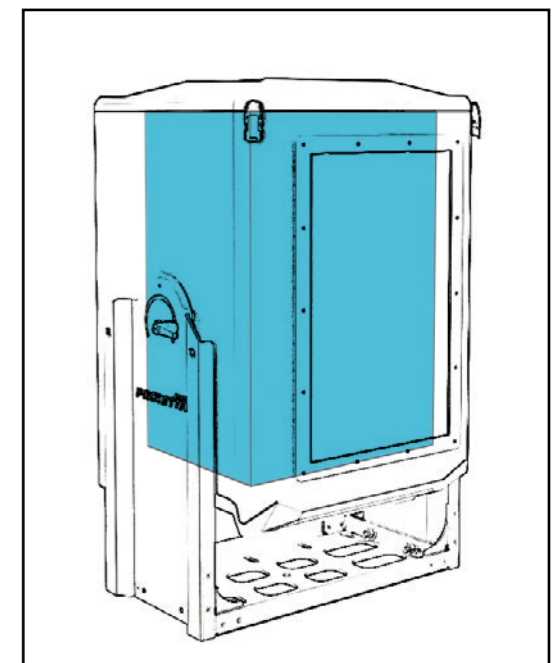

### SUITABLE FOR



# AF10

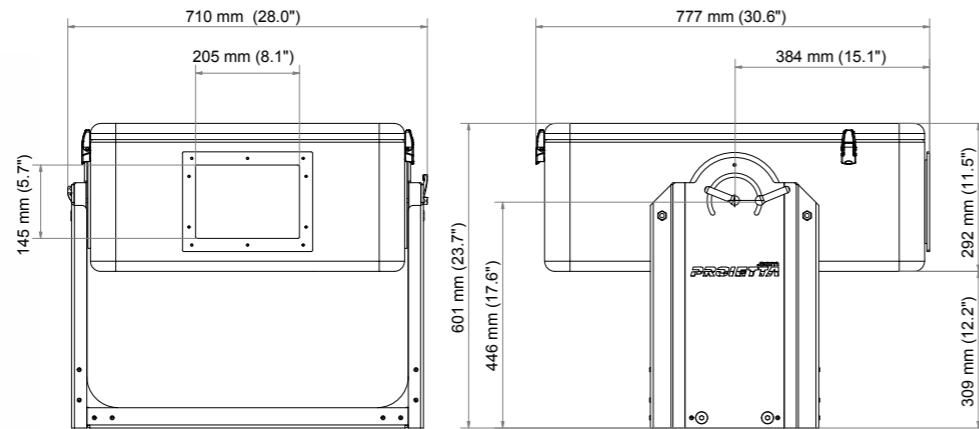

## SPECIFICATIONS:

**WEIGHT:** 37,0 kg (81.6 lbs)

**CONSUMPTION:**



Max consumption cooling mode: 50 W / 0,2 A

Max consumption during heating and dehumidification mode: 330 W / 1,5 A


### AF10 AVAILABLE SPACE WITHIN THE CASE:

	METRIC UNITS	ENGLISH UNITS
width	530 mm	20.9"
height	250 mm	9.8"
depth	500 mm	19.7"

### SUITABLE FOR

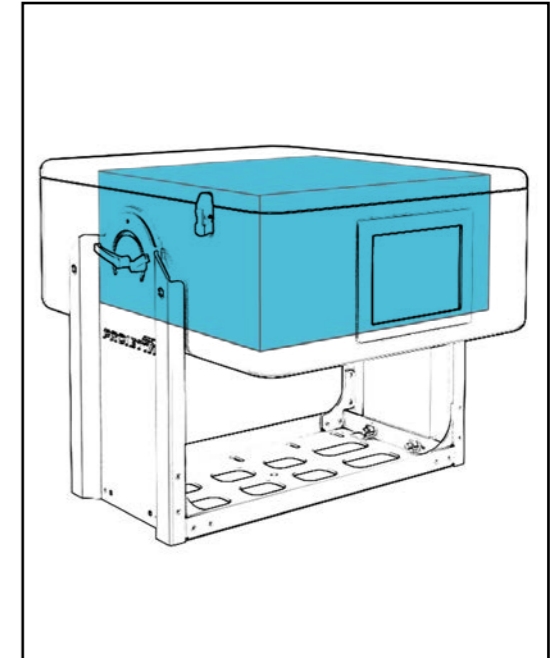

# AF10-H

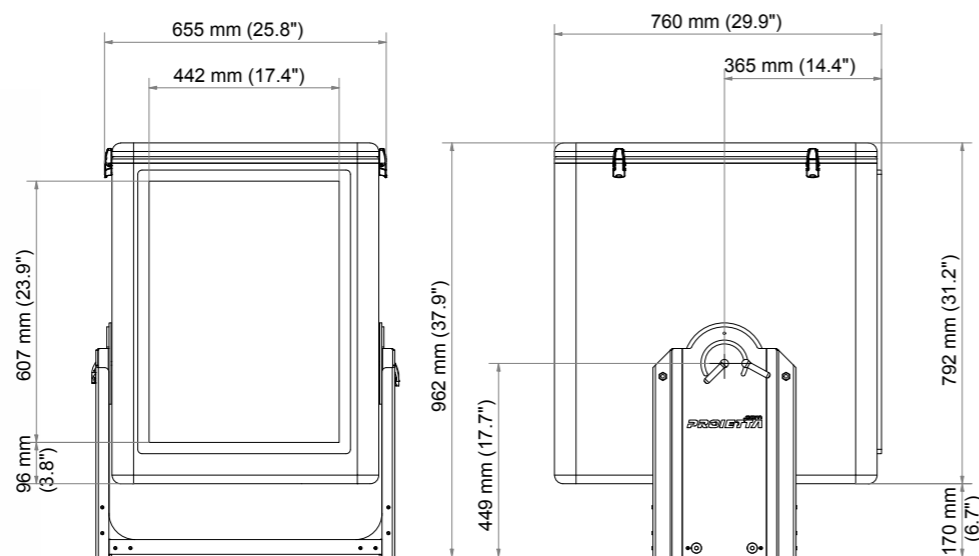

## SPECIFICATIONS:

**WEIGHT:** 55,0 kg (121.3 lbs)

**CONSUMPTION:**



Max consumption cooling mode: 50 W / 0,2 A

Max consumption during heating and dehumidification mode: 330 W / 1,5 A



### AF10-H AVAILABLE SPACE WITHIN THE CASE:

	METRIC UNITS	ENGLISH UNITS
width	530 mm	20.9"
height	750 mm	29.5"
depth	500 mm	19.7"

### SUITABLE FOR

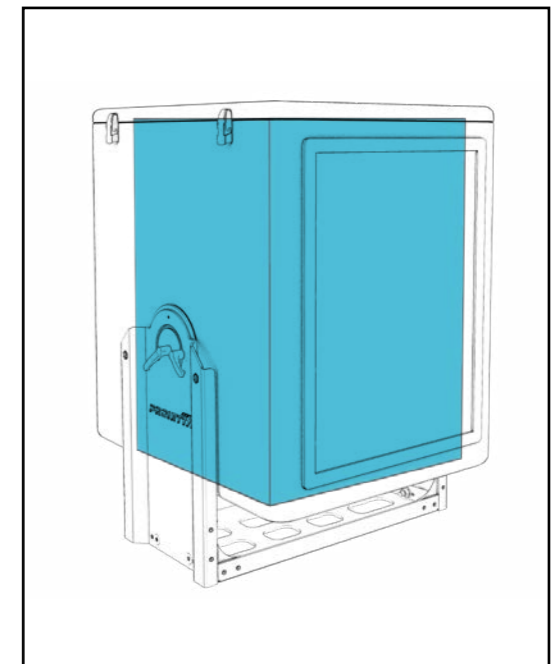

# AF20

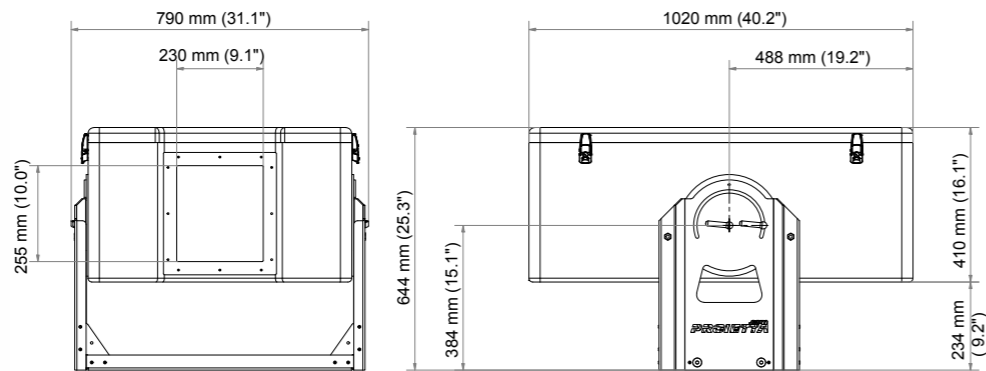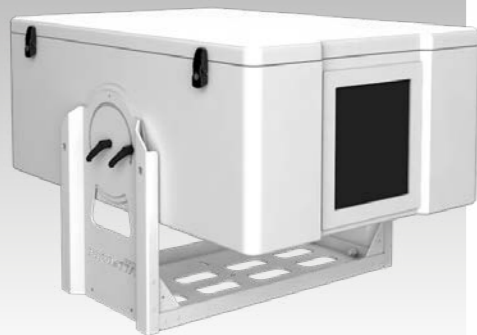

## SPECIFICATIONS:

**WEIGHT:** 65,0 kg (143.3 lbs)

**CONSUMPTION:**



Max consumption cooling mode: 110 W / 0,5 A

Max consumption during heating and dehumidification mode: 500 W / 2,3 A


### AF20 AVAILABLE SPACE WITHIN THE CASE:

	METRIC UNITS	ENGLISH UNITS
width	550 mm	21.7"
height	350 mm	13.8"
depth	700 mm	27.6"

### SUITABLE FOR

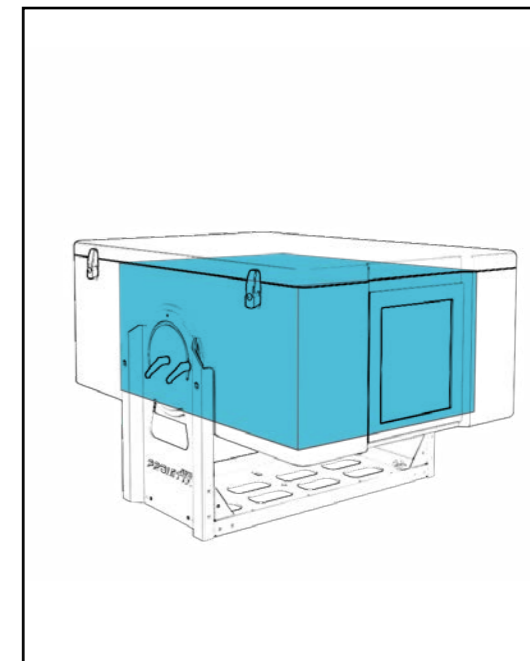

# AF20-H

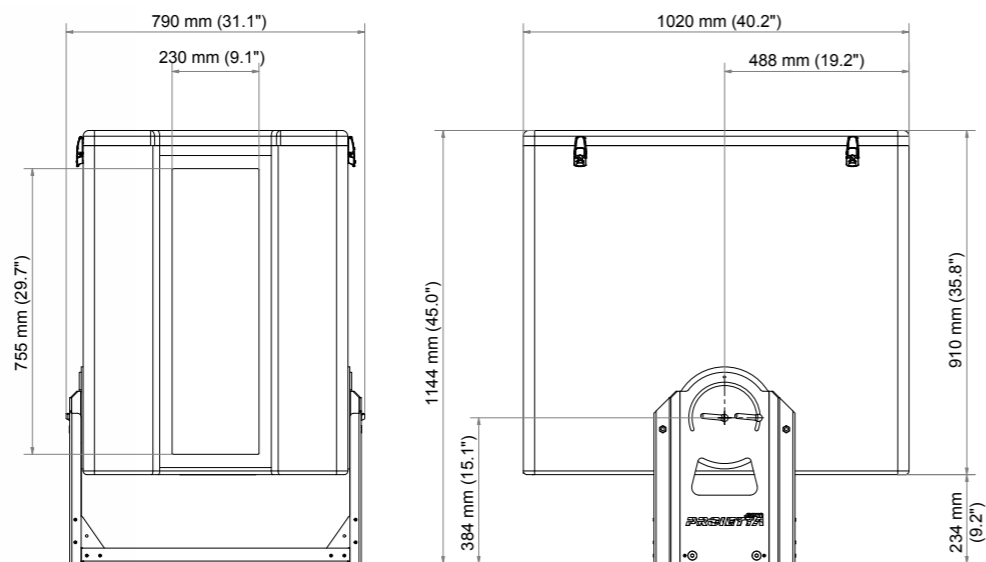

## SPECIFICATIONS:

**WEIGHT:** 90,0 kg (198.4 lbs)

**CONSUMPTION:**



Max consumption cooling mode: 210 W / 0,9 A

Max consumption during heating and dehumidification mode: 500 W / 2,3 A


### AF20-H AVAILABLE SPACE WITHIN THE CASE:

	METRIC UNITS	ENGLISH UNITS
width	550 mm	21.7"
height	850 mm	33.5"
depth	700 mm	27.6"

### SUITABLE FOR

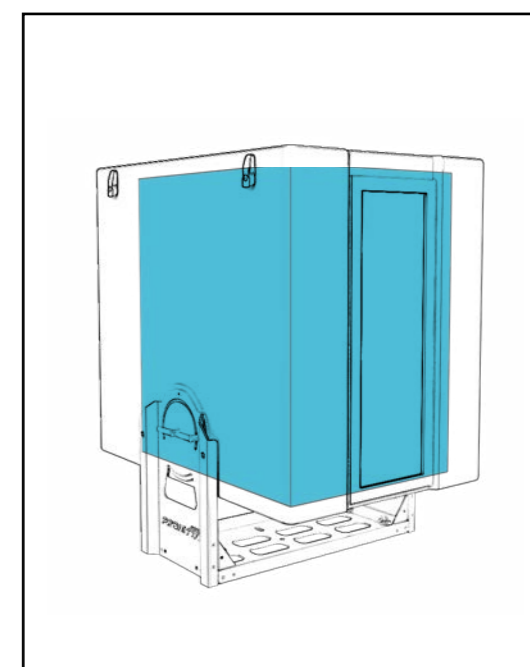

# AF24

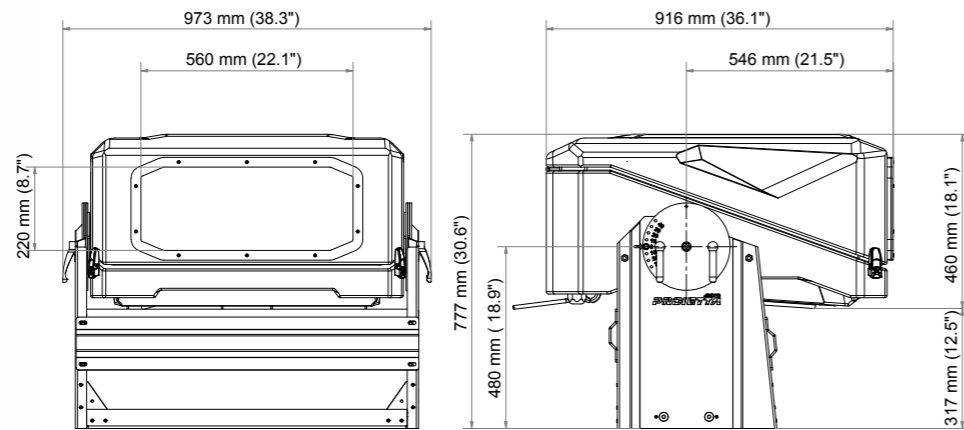

## SPECIFICATIONS:

**WEIGHT:** 80,0 kg (176.4 lbs)


**CONSUMPTION:**

Max consumption cooling mode: 110 W / 0,5 A


Max consumption during heating and dehumidification mode: 500 W / 2,3 A

### AF24 AVAILABLE SPACE WITHIN THE CASE:


	METRIC UNITS	ENGLISH UNITS
width	650 mm	25.6"
height	300 mm	11.8"
depth	600 mm	23.6"

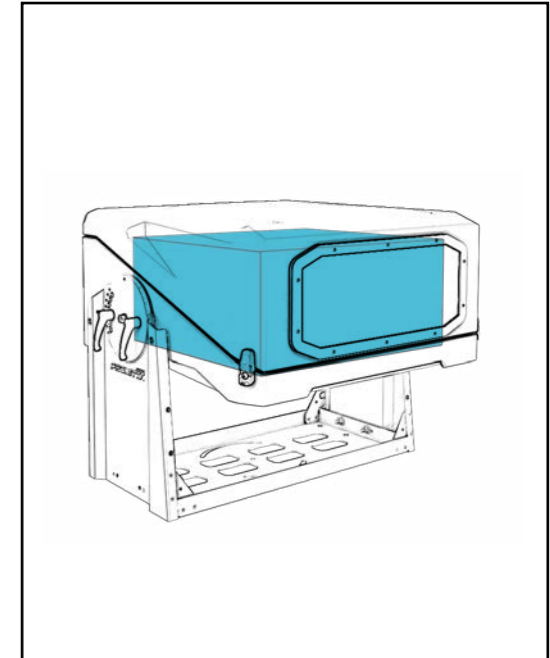

### SUITABLE FOR



# AF24-H

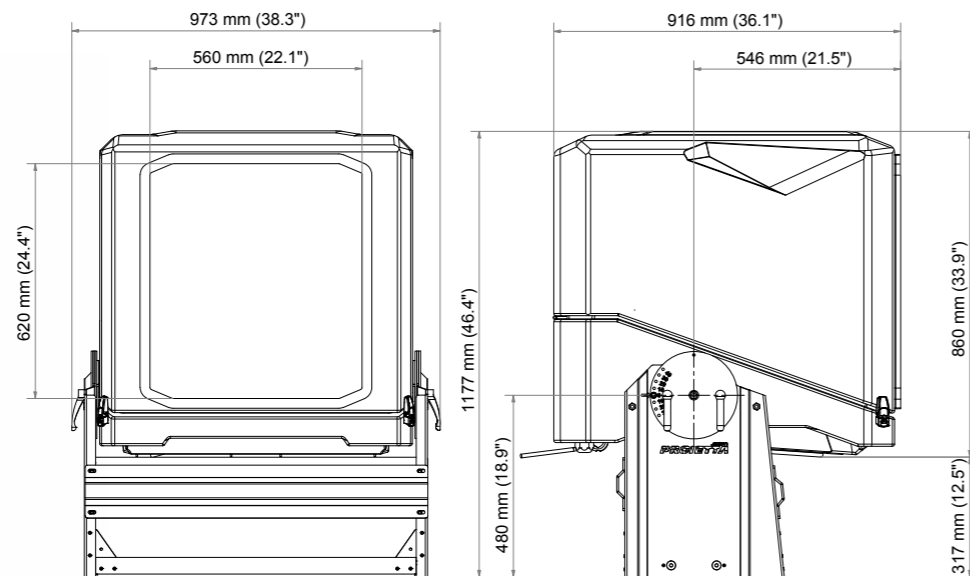

## SPECIFICATIONS:

**WEIGHT:** 115,0 kg (253.5 lbs)


**CONSUMPTION:**

Max consumption cooling mode: 210 W / 0,9 A


Max consumption during heating and dehumidification mode: 500 W / 2,3 A

### AF24-H AVAILABLE SPACE WITHIN THE CASE:


	METRIC UNITS	ENGLISH UNITS
width	650 mm	25.6"
height	600 mm	23.6"
depth	600 mm	23.6"

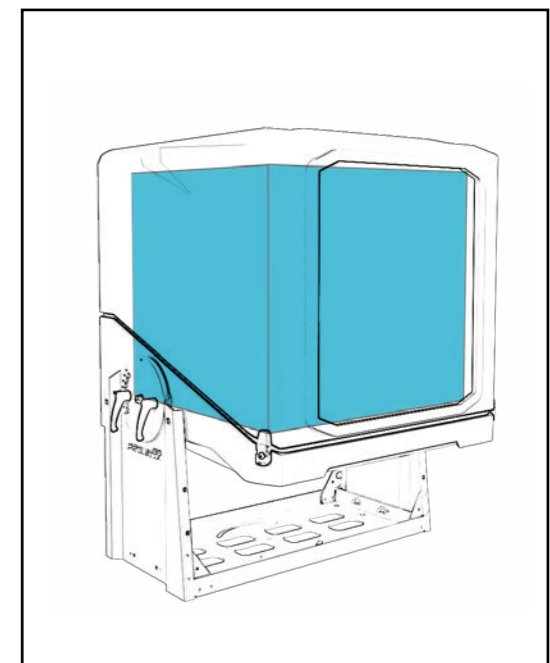

### SUITABLE FOR



# AF32

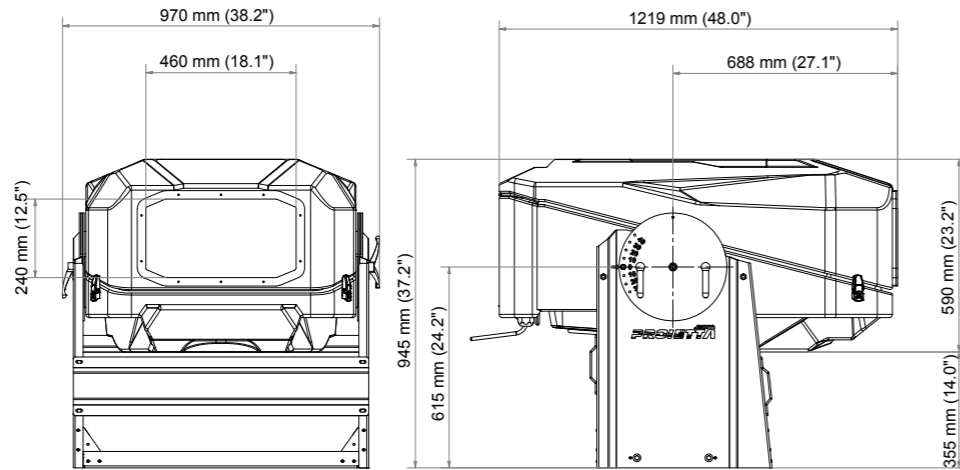

## SPECIFICATIONS:

**WEIGHT:** 115,0 kg (253.5 lbs)

**CONSUMPTION:**



Max consumption cooling mode: 220 W / 1,0 A

Max consumption during heating and dehumidification mode: 610 W / 2,8 A


### AF32 STANDARD AVAILABLE SPACE WITHIN THE CASE:

	METRIC UNITS	ENGLISH UNITS
width	650 mm	25.6"
height	350 mm	13.8"
depth	850 mm	33.5"

### SUITABLE FOR

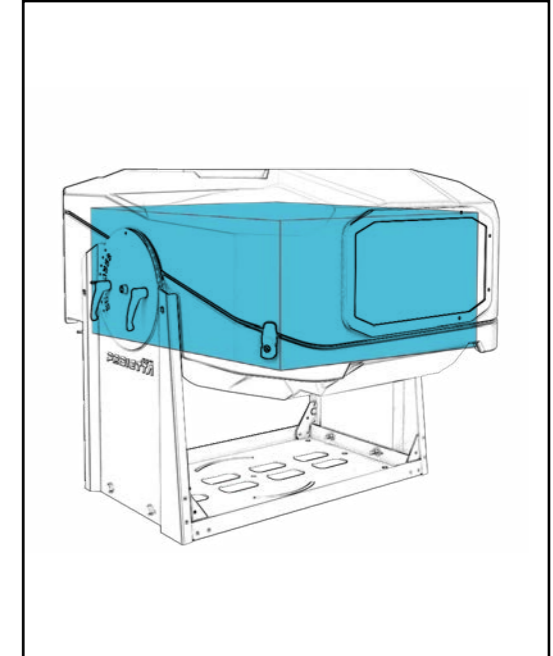

# AF32-H

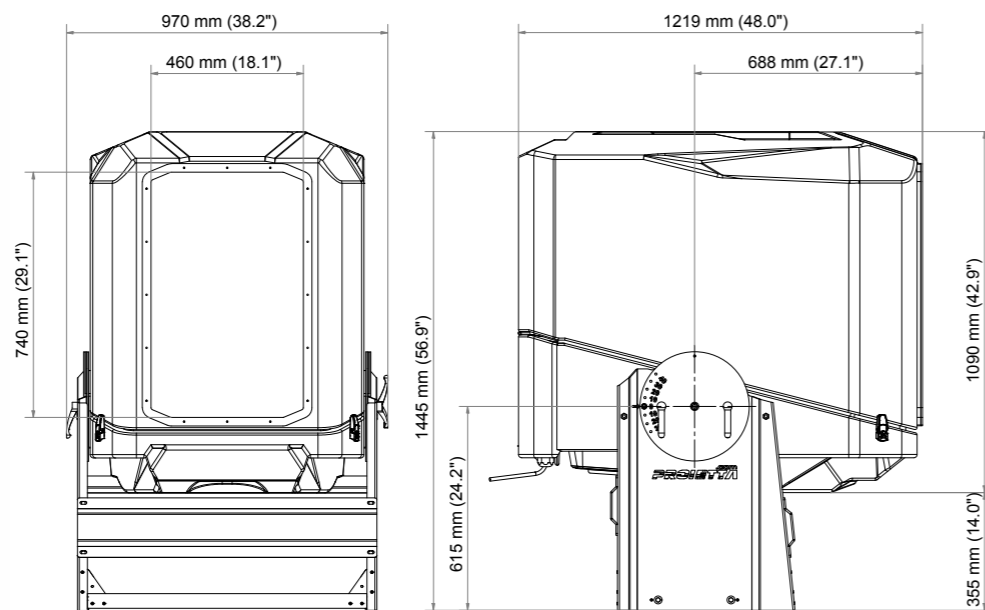

## SPECIFICATIONS:

**WEIGHT:** 165,0 kg (363.8 lbs)

**CONSUMPTION:**


Max consumption cooling mode: 330 W / 1,5 A

Max consumption during heating and dehumidification mode: 610 W / 2,8 A

### AF32-H AVAILABLE SPACE WITHIN THE CASE:



	METRIC UNITS	ENGLISH UNITS
width	650 mm	25.6"
height	850 mm	33.5"
depth	850 mm	33.5"

### SUITABLE FOR

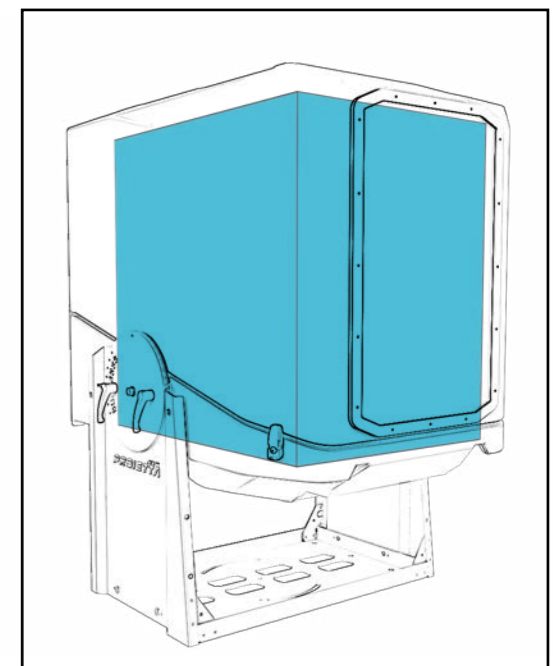



# AF40

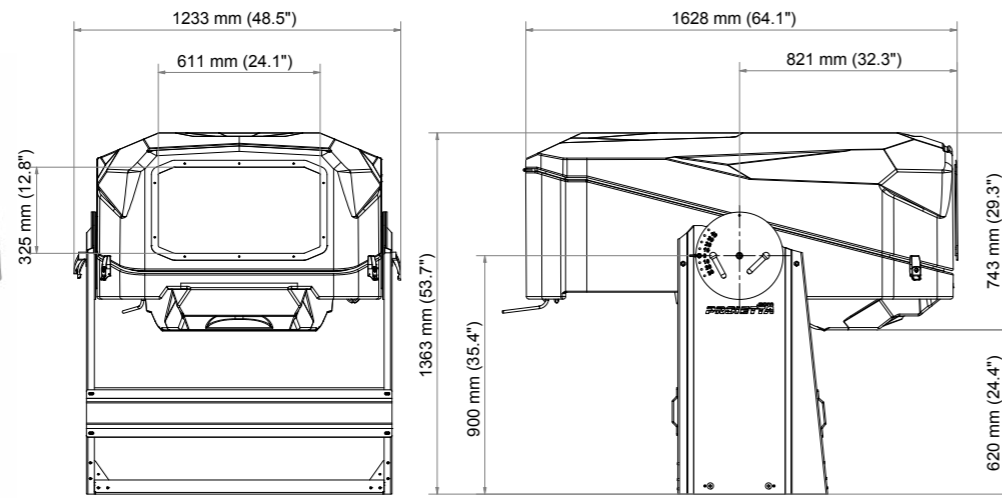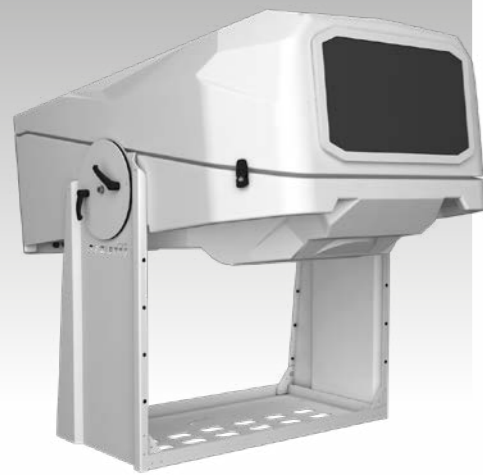

## SPECIFICATIONS:

**WEIGHT:** 170,0 kg (374.8 lbs)

**CONSUMPTION:**

Max consumption cooling mode: 220 W / 1,0 A

Max consumption during heating and dehumidification mode: 610 W / 2,8 A

### AF40 AVAILABLE SPACE WITHIN THE CASE:

	METRIC UNITS	ENGLISH UNITS
width	880 mm	34.7"
height	450 mm	17.7"
depth	1250 mm	49.2"

### SUITABLE FOR



LANDSCAPE




PORTRAIT




STACK



MULTI PORTRAIT

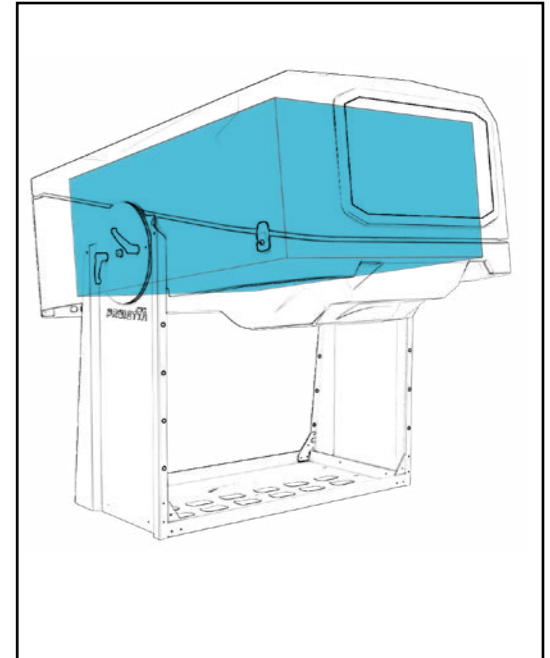

# AF40-H

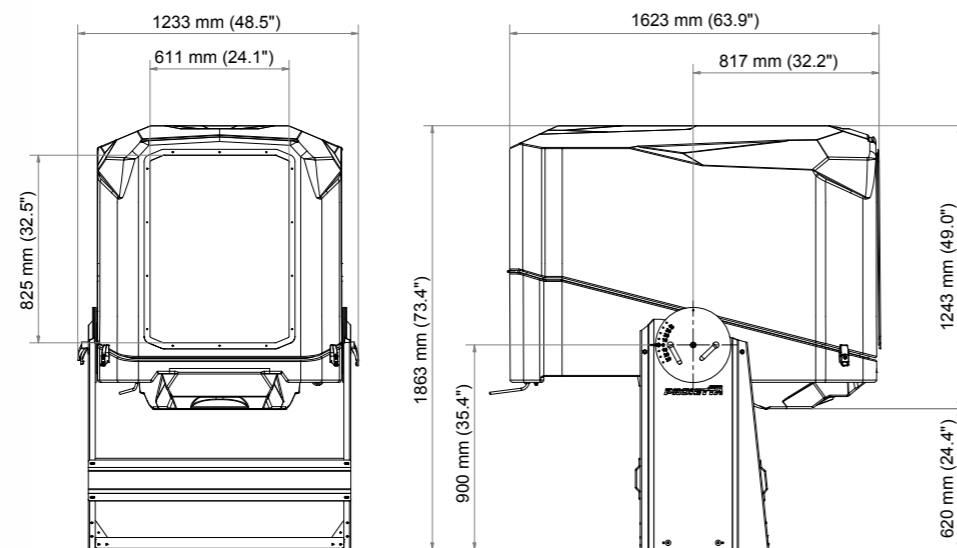

## SPECIFICATIONS:

**WEIGHT:** 235,0 kg (518.1 lbs)

**CONSUMPTION:**

Max consumption cooling mode: 330 W / 1,5 A

Max consumption during heating and dehumidification mode: 610 W / 2,8 A

### AF40-H AVAILABLE SPACE WITHIN THE CASE:

	METRIC UNITS	ENGLISH UNITS
width	880 mm	34.7"
height	950 mm	37.4"
depth	1250 mm	49.2"

### SUITABLE FOR



LANDSCAPE




PORTRAIT




STACK



MULTI PORTRAIT

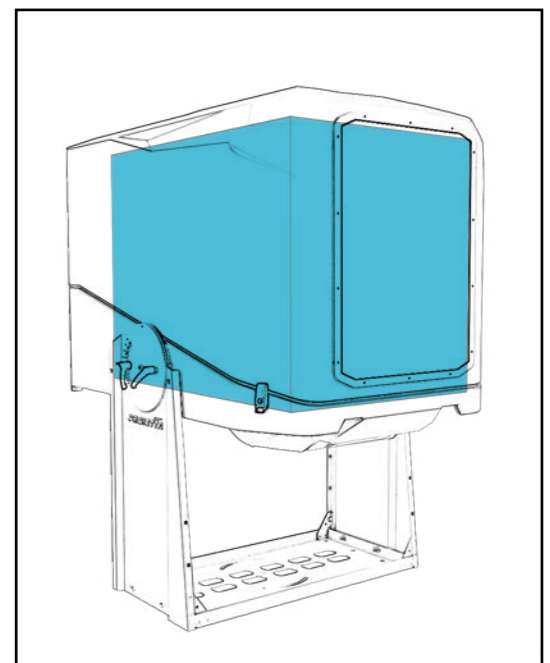

# AF55

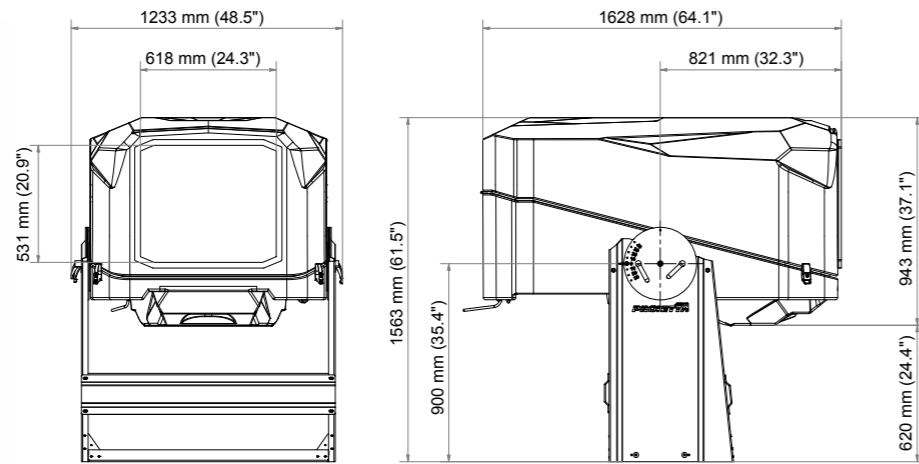

## SPECIFICATIONS:

**WEIGHT:** 215,0 kg (474.0 lbs)


### CONSUMPTION:

Max consumption cooling mode: 220 W / 1,0 A

Max consumption during heating and dehumidification mode: 610 W / 2,8 A

### AF55 AVAILABLE SPACE WITHIN THE CASE:

	METRIC UNITS	ENGLISH UNITS
<b>width</b>	<b>880 mm</b>	<b>34.7"</b>
<b>height</b>	<b>650 mm</b>	<b>25.6"</b>
<b>depth</b>	<b>1250 mm</b>	<b>49.2"</b>

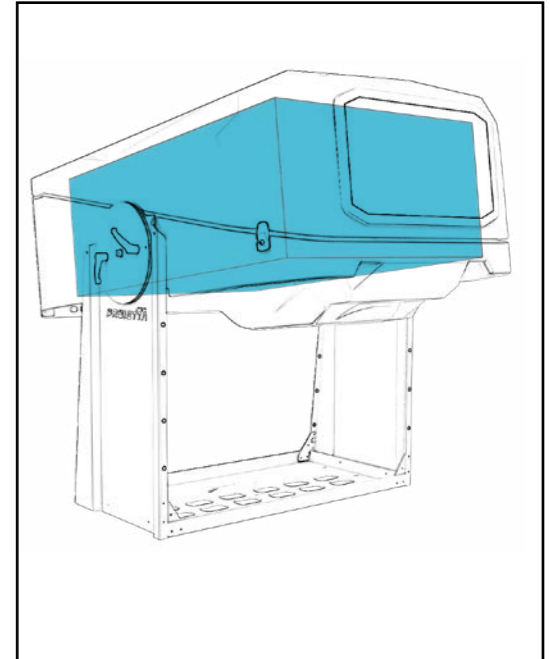

### SUITABLE FOR



LANDSCAPE



PORTRAIT



STACK



MULTI  
PORTRAIT

## CUSTOMIZE YOUR CASE


any RAL colour is available on request



RAL 6011 + RAL 9005



RAL 9017

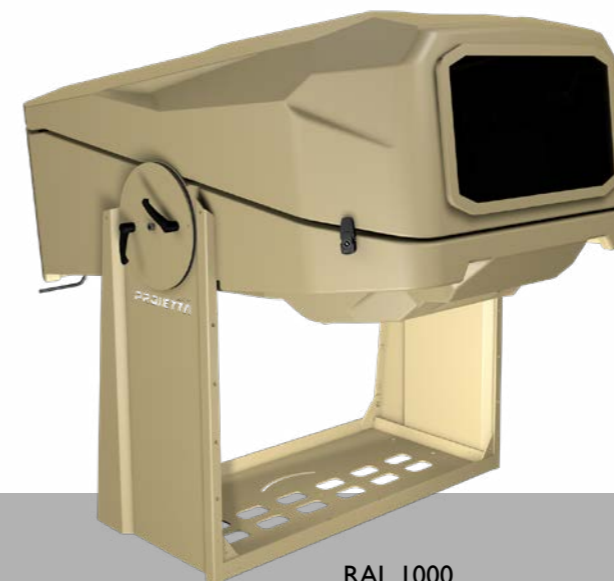

RAL 1000



RAL 5024 + RAL 9017




# CUSTOMIZABLE FOR UST LENS


There are a lot of different Ultra Short Throw configuration on the market. That's why it's really important to know exactly the lens model you are planning to use.



# SELF SUPPORTING POLE

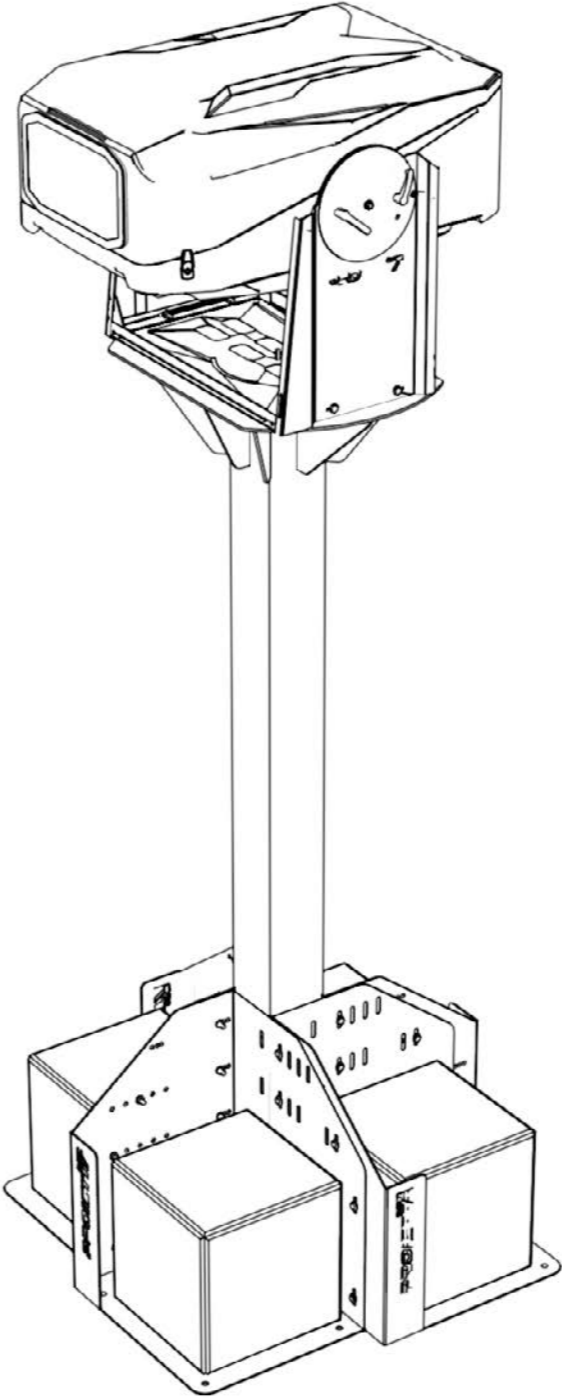

# SUPPORTING POLE WITH PLINTH

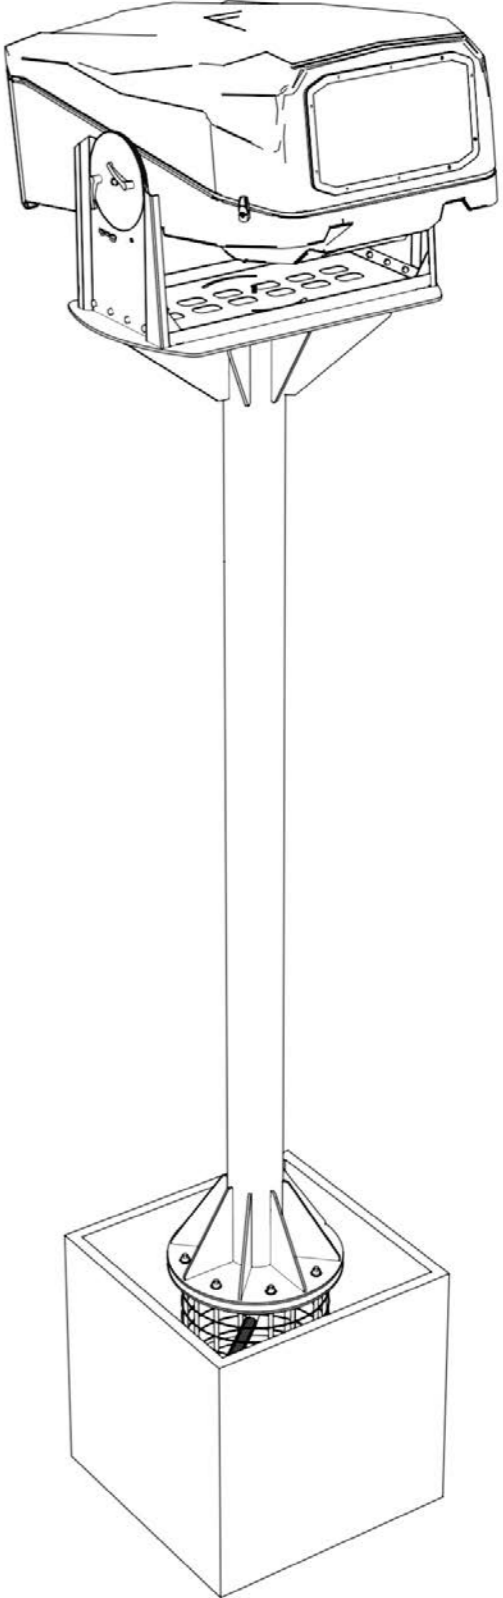

# AC COOLER - SAND STORM PROTECTION

The Air Conditioning unit allows you to install projectors outdoors in very hot climates thanks to its high cooling capacity. **PROIETTA AC Cooler** reduces projector inlet temperatures assuring optimal operating conditions. Our optional AC unit also filters the air preventing damage caused by sand, dust and smog.





# ACCESSORIES




ANTI-THEFT LOCK

MIRROR FOR THE PROJECTION ON FLOOR

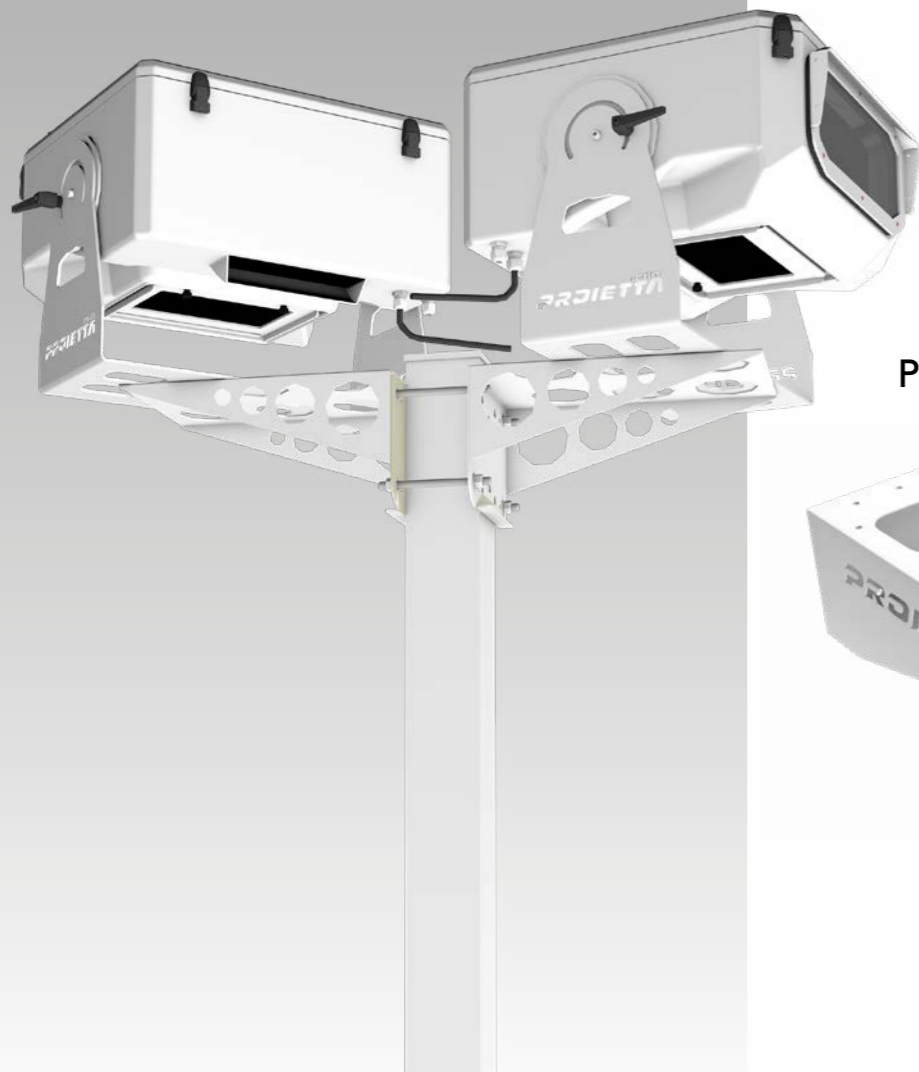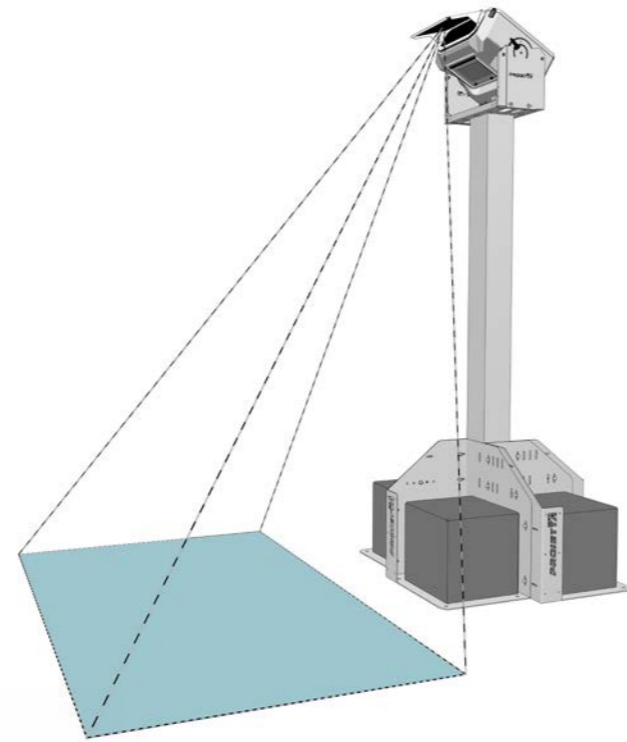


POLE AND WALL BRACKET

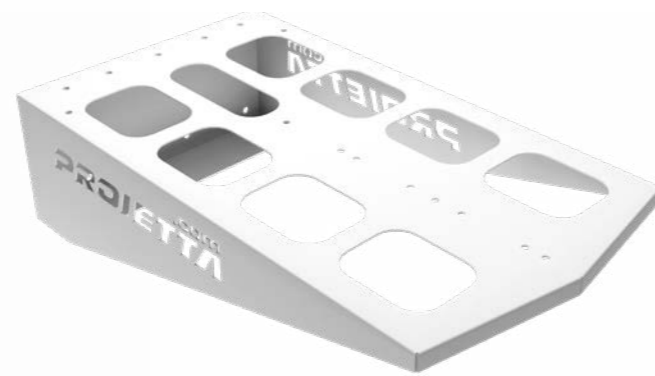

- temperature inside the case
- incoming temperature
- internal humidity
- fan operation


Each model is equipped with a Bluetooth board that allows to monitor the operating status of the protective enclosure with Android or Apple devices.

As optional there is the Ethernet board allowing to monitor the operating status of the protective enclosure from PC (remote control).

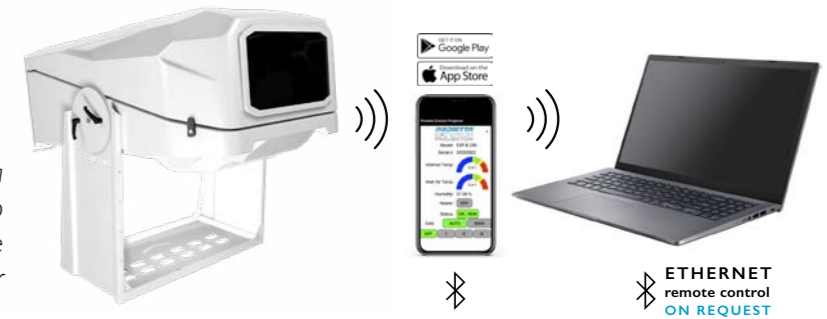

CASE MONITORED BY PROIETTA APP

STACKING FRAME

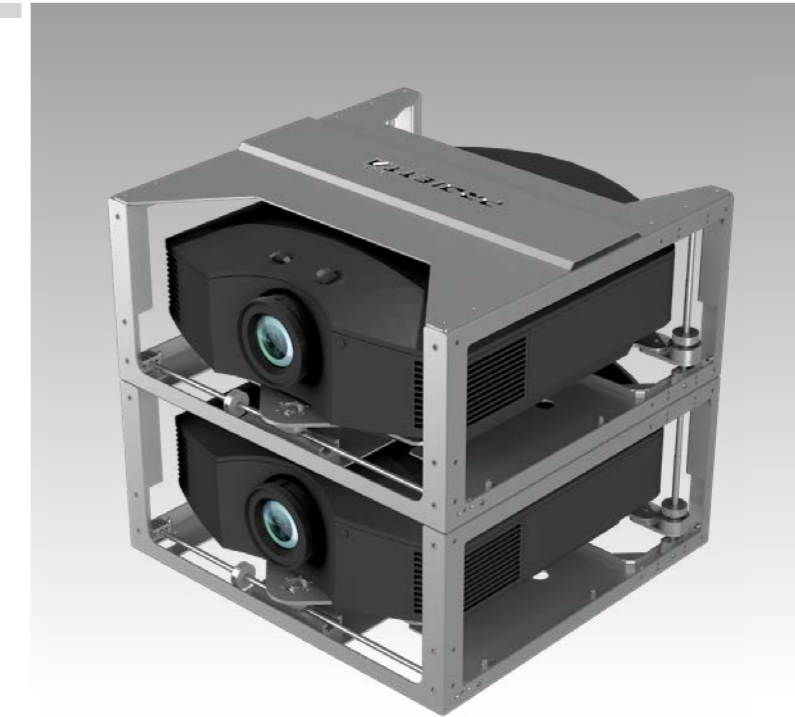

**PROIETTA**<sup>®</sup>

[www.exteriorprojector.com](http://www.exteriorprojector.com)

[www.proietta.com](http://www.proietta.com)

[av@proietta.com](mailto:av@proietta.com)

